

March 2021

SAFETYZONE MAGAZINE

**The
Work
Glove
Triple
Threat**





Online Continuing Education Opportunities in Safety

Columbia Southern University's Department of Continuing Education is proud to offer courses that allow students the opportunity to enhance their current careers and provide them with relevant training.

Safety Course Information

- » Continuing Education courses are completely online, open enrollment, and students are given 10 weeks to complete.
- » Continuing Education course fees include textbooks and other learning materials.
- » Certificates of Completion are issued after successful completion of CEU course.
- » Online ASP® and CSP® Exam Prep Courses provide students with a comprehensive review of the ASP® and CSP® subject matter.

For more information, please visit our website at ColumbiaSouthern.edu/SafetyCEU, contact ContinuingEd@ColumbiaSouthern.edu or call 800.313.1992.




**COLUMBIA
SOUTHERN**
UNIVERSITY

ColumbiaSouthern.edu/SafetyCEU » 800.313.1992

ELIMINATE FALL HAZARDS

AT YOUR FACILITY WITH THE SRC360 MOBILE RAIL SYSTEM

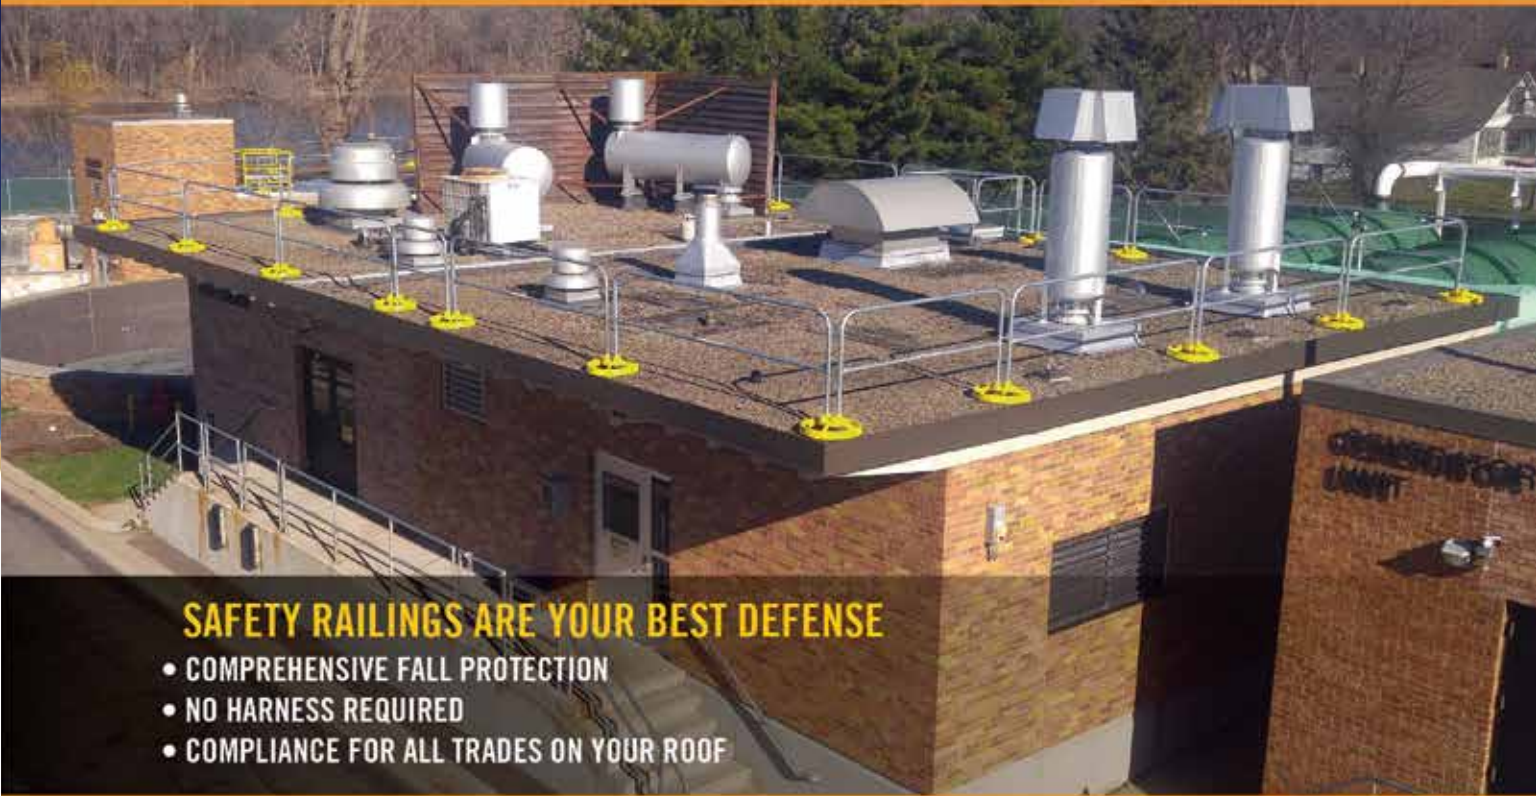

SAFETY RAILINGS ARE YOUR BEST DEFENSE

- COMPREHENSIVE FALL PROTECTION
- NO HARNESS REQUIRED
- COMPLIANCE FOR ALL TRADES ON YOUR ROOF

FROM START TO FINISH, FALL PROTECTION AND PEACE OF MIND HAVE NEVER BEEN EASIER

OSHA COMPLIANT | NON-PENETRATING | EASY INSTALLATION

We offer a full menu of fall protection products addressing individual hazards or combined together for a comprehensive, 100% fall protection solution for the entire facility.

- EXPERT ADVICE
- FACILITY SITE SURVEYS & CAD MODELING
- FULFILLMENT, DELIVERY, INSTALL & SIGNOFF



PROTECT LIVES.
BE OSHA COMPLIANT.
CONTACT US TODAY.

MADE IN USA 

ANALYZE • SPECIFY • MANUFACTURE • INSTALL

ASK ABOUT OUR TURNKEY SOLUTION PACKAGE



SafetyRailCompany
Fall Protection for Life and Compliance

SAFETYRAILCOMPANY.COM | 888.434.2720

SZM Contents • March 2021

PG 4	JLG® DaVinci™ AE1932 Scissor Lift - The Future of Electric Scissor Lifts is Here
PG 10	New PROTECTOR Shields Provide Highest Level of Safeguarding to Milling Machines, Drills and Other Metal Cutting Equipment
PG 14	Company Profile: Safety Through Engineering
PG 16	The Work Glove Triple Threat
PG 20	Low Voltage Electrical Hazards in the Workplace
PG 24	Ad Index



Pg 16

WP MAKE EVERY STEP A SAFE ONE

Help Prevent

Flex-Tred®

SLIP AND FALLS

Stairmaster®

WOOSTER PRODUCTS

For more products & information visit us on-line or call:
www.wooster-products.com
800-321-4936

MADE IN U.S.A. PRODUCT

SAFETYZONE MAGAZINE

Vol. 21 Issue 3

PRESIDENT

Glen Hobson
205-441-5591
glen@handfmedia.net

DIRECTOR OF ADVERTISING

Jake Dimenna
205-624-2182
jake@handfmedia.net

DIRECTOR OF BUSINESS

Butch Cole
205-624-2180
butch@handfmedia.net

ADMINISTRATIVE DIRECTOR

Steven Hobson
steven@handfmedia.net

EDITOR

Brandon Greenhill
brandon@handfmedia.net

CREATIVE/ WEB DIRECTOR

Jacklyn Greenhill
jacklyn@handfmedia.net

P.O. Box 1568 • Pelham, AL 35124
Phone: 205-441-5591 • Fax: 205-624-2181
www.safetyzonemagazine.com
info@safetyzonemagazine.com



New Construction Products™ is published twelve times a year on a monthly basis by H & F Media, Inc. *New Construction Products™* is distributed free to qualified subscribers. Non-qualified subscription rates are \$57.00 per year in the U.S. and Canada and \$84.00 per year for foreign subscribers (surface mail). U.S. Postage paid at Birmingham, Alabama and additional mailing offices.

New Construction Products™ is distributed to qualified owners and managers in the construction industry. Publisher is not liable for all content (including editorial and illustrations provided by advertisers) of advertisements published and does not accept responsibility for any claims made against the publisher. It is the advertiser's or agency's responsibility to obtain appropriate releases on any item or individuals pictured in an advertisement. Reproduction of this magazine in whole or in part is prohibited without prior written permission from the publisher.

POSTMASTER: Send address changes to
H & F Media, Inc. P.O. Box 1568
Pelham, AL 35124
PRINTED IN THE USA



LADDER COMPLIANCE MADE EASY

LAD-TOP SECURES YOUR FIXED LADDERS KEEPING YOUR WORKERS SAFE FROM FALL

LAD-TOP® was designed with one thing in mind: worker safety. OSHA's Walking Working Surfaces Standard 1910.27 now requires all new fixed ladders over 24 feet to have a ladder safety system in place. We had safety on the mind long before it became a requirement.



EASY INSTALLATION

LAD-TOP® is self-supporting making it simple to install. Four standard bolts + five minutes and you are done!



INDUSTRY LEADING CORROSION PROTECTION

LAD-TOP® offers you up to 2.5x corrosion protection with a Duplex coating of hot dip galvanized and powder coated paint of your choosing.



BUILT TO A HIGHER STANDARD

There is no standard when it comes to protecting your employees. Our products are built to surpass the minimum standard and are some of the only products designed and tested to comply with OSHA and ANSI Z359.18-2017 standard.



INTERCHANGEABLE SRL

LAD-TOP® is interchangeable with your existing self-retracting lifelines. The product will work with SRLs you already own. You are not limited to where you choose to source them.



FITS YOUR EXISTING HARDWARE

Two LAD-TOP® options are available: one for front ladder exit and one for side ladder exit.



AFFORDABLE USA QUALITY

LAD-TOP® is 100% sourced and assembled in the USA. Ask us about volume discounts!

FALL PROTECTION AT ITS BEST

Contact us today to learn more about LAD-TOP® and how to order for your facility!

ladtop.com | 270.415.5201 | 5050 Leonard Futrell Rd., Paducah, KY 42001

JLG® DaVinci™ AE1932 Scissor Lift – The Future of Electric Scissor Lifts is Here

*Setting new industry benchmarks for
performance and maintenance*

JLG Industries, Inc., an Oshkosh Corporation company and leading global manufacturer of mobile elevating work platforms (MEWPs) and telehandlers, elevates the access industry once again with its now available all-electric DaVinci™ AE1932 scissor lift. Featuring zero hydraulics to help eliminate job site leaks and zero emissions to help control job site pollution, this 19-ft (5.79 m) scissor lift is purpose-built for applications where stringent environmental regulations must be met.

Every component on the DaVinci scissor is fully optimized, including the control, lift, drive and steering systems, to reduce the machine's energy consumption by up to 70% as compared to a traditional scissor lift. This reduced energy consumption allows for the use of a single, lithium-ion battery.

"The DaVinci AE1932 scissor lift represents the next generation of electrification," says Shashank Bhatia, senior director of engineering for MEWPs at JLG. "While there is no shortage of battery-powered or electric scissor lifts on the market today, these other models continue to include hydraulic cylinders for actuation, which require hydraulic oil for operation, leaving the possibility open for messy leaks on sensitive job sites. JLG continues to push the envelope in innovation around the entire construction ecosystem, from our rental partners to job sites. This new JLG® all-electric machine unlocks new possibilities and applications where these types of machines could not be used in the past due to concerns surrounding leaks."

Control System

DaVinci lifts use a distributed architecture where each system (lift, drive and steer) is connected independently, helping reduce voltage drops and latency, while enabling the control system on the scissor to connect and communicate directly with each system.

Because the control system is fully connected to the entire machine, the DaVinci scissor can transmit data back to operators, fleet managers and service technicians via Bluetooth and cellular networks. This sets the stage for new features like the DaVinciGo app. This app provides real-time machine health and battery status information and the ability for service technicians to perform remote diagnostics and push over-the-air software updates.





SHAPING THE FUTURE OF SAFETY

SERVICES & SOLUTIONS

Competence Management
Crisis Management
Emergency Response
Training Management Services
Tailormade Courses
Maritime Licensing
STCW Refresher Training

TRAINING

Advanced & Industrial Fire
Drilling & Well Control
Safety & Survival
Rigging, Lifting & Crane
Crisis Management
Health, Safety & Environment
Digital Training
Technical
Renewables
Maritime

RelyOn Nutech
360° Safety

www.relyonnutech.com

HOUMA, LA | LAFAYETTE, LA | HOUSTON, TX
For course dates, locations and to book
your classes: 1.866.404.9564 or
bookings@us.relyonnutech.com

OMEGA

SAFETY BARRIERS & GUARDS



SAFETY BARRIERS



R-U-F PORTABLE BARRIERS



PIPE GUARDS



COLUMN GUARDS



CORNER SHIELDS



BOLLARDS



HANDRAILS & GATES



RACK GUARDS



QUIK-STEP STAIRS



TRAK-SHIELD

Downspout Pipe Guards, HDPE Bollard Covers
and many other safety products available.

www.omegaindl.com

800-521-8272

Omega Industrial Products - The Nation's Leading Supplier
Of Safety Barriers & Guarding Products

Drive System

The drive system on the all-electric DaVinci lift has permanent magnets which generate torque and create motion to spin the motor. It is estimated that permanent magnet performance can increase the efficiency of a motor by up to 20-30% on average. Motors with permanent magnets have a long life and require zero serviceability.

Steer System

For smooth operation, the independent controllers of the DaVinci lift's steering system are designed to help reduce tire scrubbing on job sites, which helps control tire wear and limits damage to sensitive flooring.

The AE1932's intuitive steering system allows DaVinci lift operators to easily maneuver the machine into and around, narrow-access and space-restricted areas to get work done where it's needed.

Lift System

The lift system on the new DaVinci scissor lift is designed with an electromechanical lift actuator, replacing the hydraulic cylinder design of traditional electric scissor lifts. Since there are no hydraulics, the AE1932 does not leak, which means it can be used without diapers.


"The simplified design makes the AE1932 noticeably different when working at height," says Rafael Nunez, senior product manager of scissor and vertical lifts at JLG. "Traditional battery-powered lifts have hoses routed throughout the scissor stack, whereas the DaVinci lift has no hoses for a clean, modern appearance with significantly reduced maintenance and service requirements."

Furthermore, the DaVinci scissor lift system is engineered to recover energy as the platform descends, sending it back to the battery to help maximize use between charges.

Battery System

DaVinci lifts can be fully charged in as little as 3-1/2 hours, increasing its utilization throughout the workday as compared to traditional electric powered lifts that require up to 3 times longer to charge.

For additional productivity gains, the system can also be opportunity charged in 5 minutes or less for 100 ft (30.48 m) of drive, plus enough torque for loading.

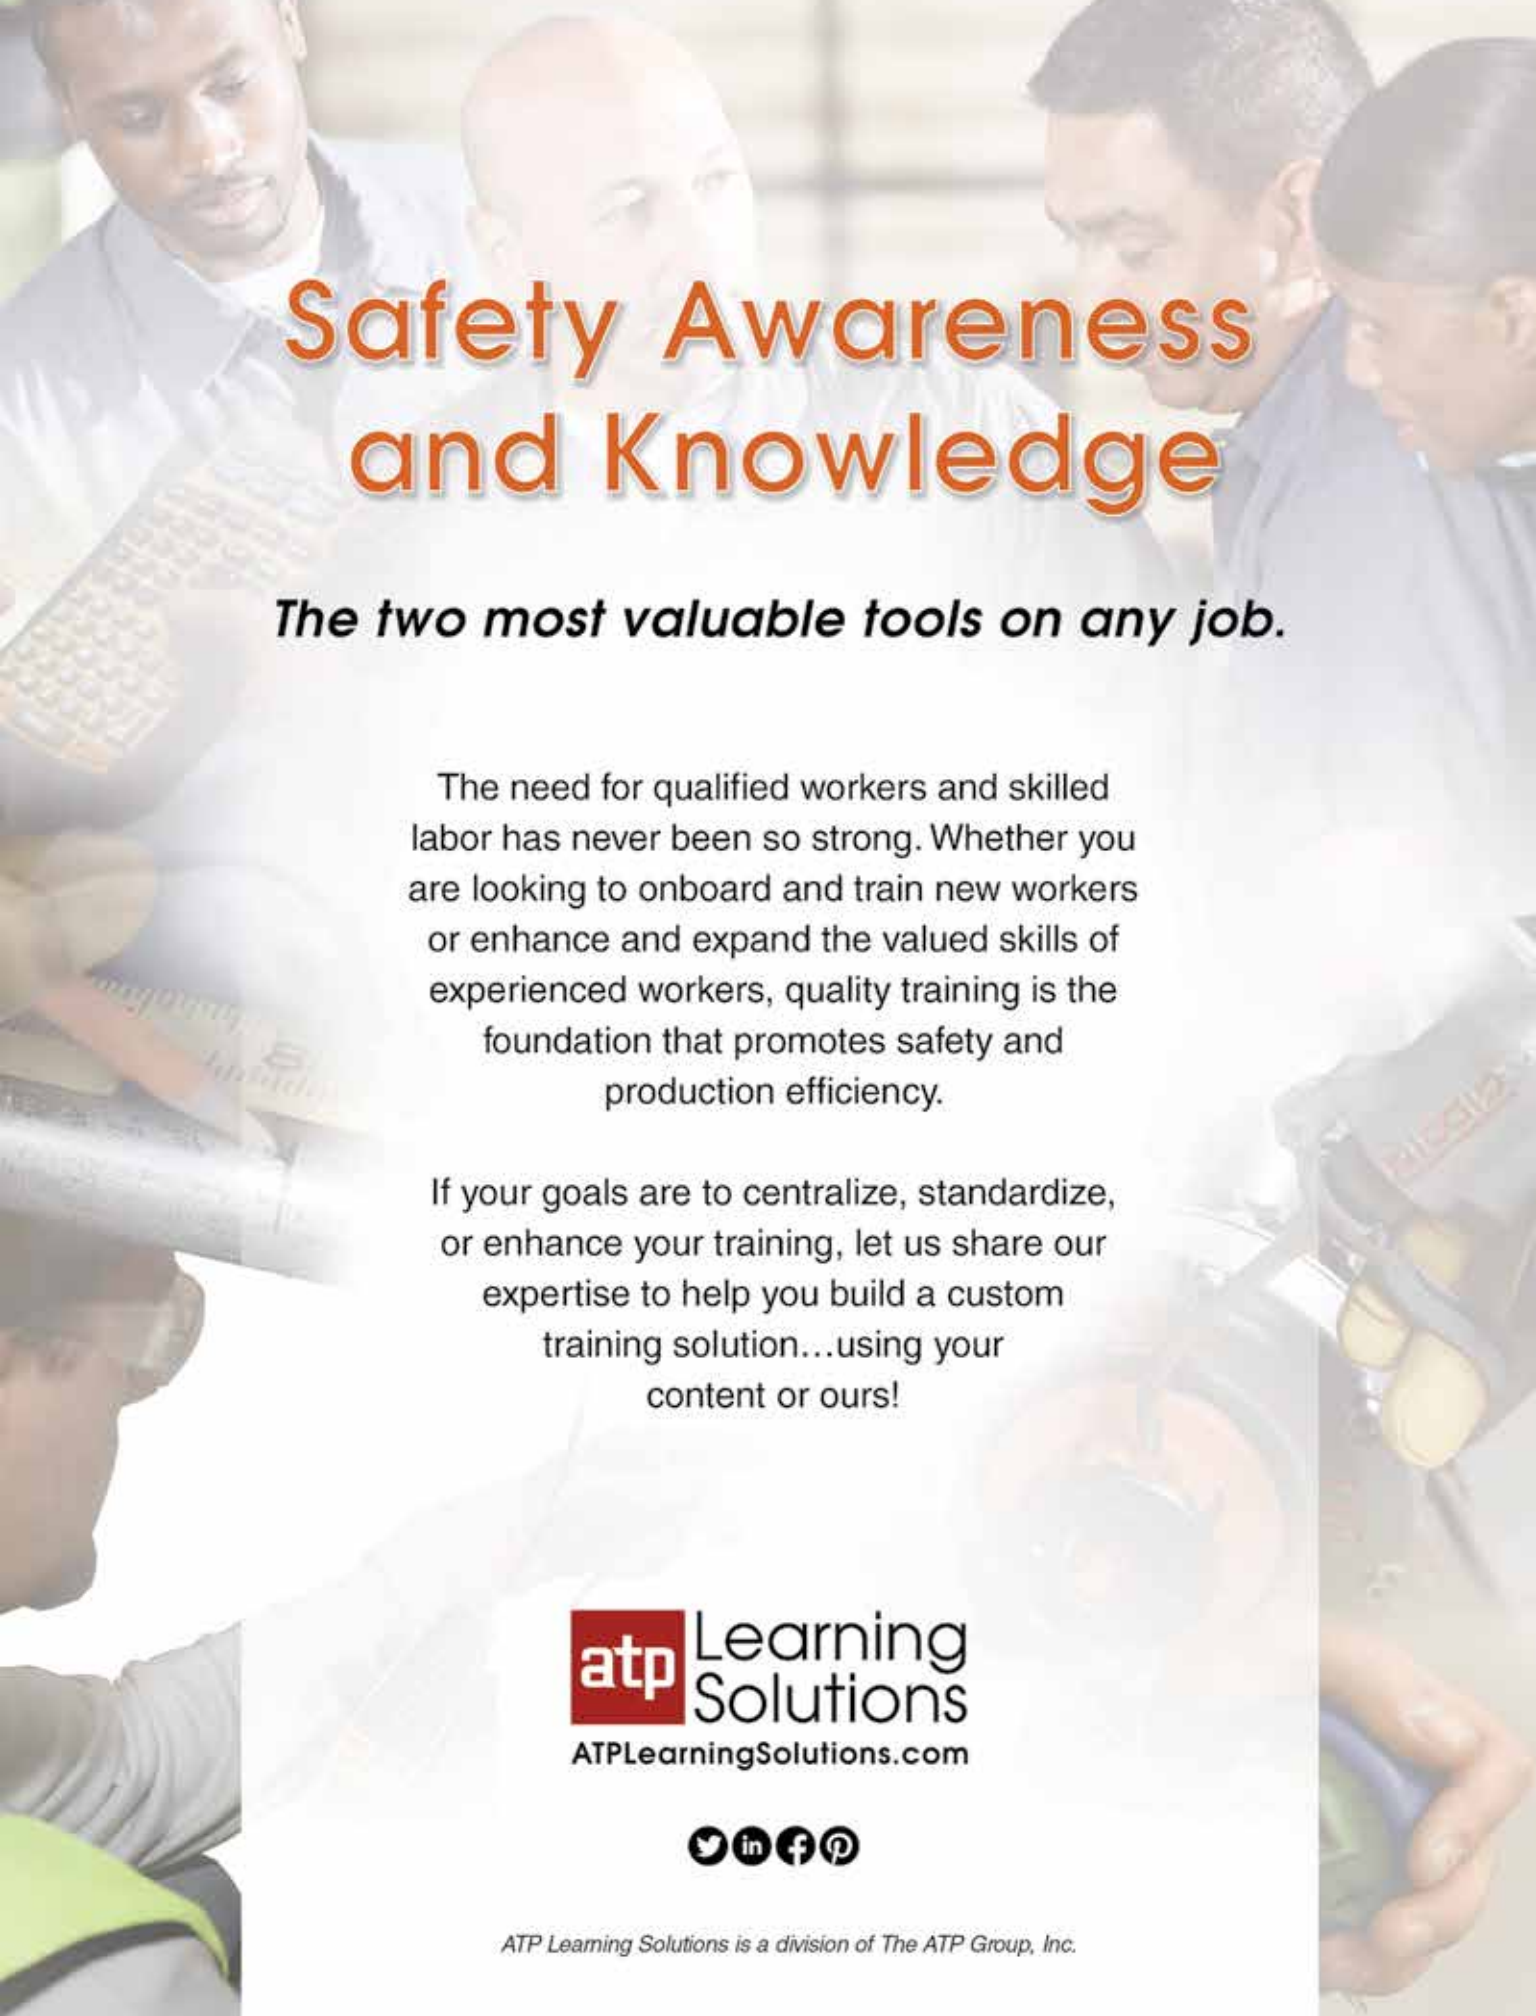

Safety Awareness and Knowledge

The two most valuable tools on any job.

The need for qualified workers and skilled labor has never been so strong. Whether you are looking to onboard and train new workers or enhance and expand the valued skills of experienced workers, quality training is the foundation that promotes safety and production efficiency.

If your goals are to centralize, standardize, or enhance your training, let us share our expertise to help you build a custom training solution...using your content or ours!

atp Learning
Solutions
ATPLearningSolutions.com



ATP Learning Solutions is a division of The ATP Group, Inc.

WE HAVE THE ROPE TO GET THE JOB DONE.



The DaVinci lift's lithium-ion battery can last up to 10-years, which means that the battery should not need to be replaced, and requires no maintenance, throughout the entire design-life of the scissor lift.

In addition, the DaVinci lift features an advanced battery management system that monitors the machine's charge and usage, while providing detailed diagnostic information about the battery and charge systems via the DavinciGo App.

Performance Specs

The all-electric DaVinci AE1932 scissor lift answers the industry's expectation for performance and productivity in 19-ft (5.79 m) scissor lifts, including an indoor/outdoor 606-lb (275 kg) capacity rating.

The DaVinci AE1932 lift has a 4-mph (6.44 km/h) travel speed, which is up to 2x faster than a traditional scissor lift. This enables the machine to move quickly around job sites.

Another productivity enhancing feature is progressive elevated drive speed, a JLG industry first. This function slows the unit down as its elevated, instead of defaulting to 0.5 mph (0.80 km/h) like a standard scissor lift.

The machine has a compact footprint, weighs 3,450 lb (1,564.89 kg) and 25% gradeability.

DaVinci lifts also comply with the latest ANSI and CSA industry standards, featuring a load sensing system, self-closing gate and the JLG QuikFold rail system. It comes standard with JLG Mobile Control, allowing users to drive, steer and load the scissor lift from any iOS or Android mobile device.

"With its productivity features for end-users, the DaVinci AE1932 scissor lift sets a new benchmark in the industry for both performance and maintenance," says Nunez.

For more information about the JLG DaVinci AE1932 scissor lift, please visit www.allelectricscissor.com. For more information about JLG, visit www.jlg.com.

www.jlg.com •



800-358-7673

www.bucrope.com



Online
training

**E-Learning
Critical for
Keeping Your
Organization
Trained During
COVID-19**

CORE
SAFETY GROUP



New PROTECTOR Shields Provide Highest Level of Safeguarding to Milling Machines, Drills and Other Metal Cutting Equipment

When it comes to milling machines and drills, a safety shield can make the difference between a productive day and a very serious injury. Yet sometimes a standard shield isn't rugged enough, or it limits visibility due to reflectivity, or an operator is able to simply bypass it by pushing it out of the way, thereby making the machinery unsafe to operate.

To combat these issues, Rockford Systems has introduced PROTECTOR Shields for safeguarding mills, drills, lathes, grinders and other cutting and turning machines. Constructed of 14-gauge powder-coated steel and thick 3/16" shock-proof, scratch-resistant polycarbonate, PROTECTOR shields defend operators from flying debris, lubricants, coolants and swarf. Plus, they incorporate cool, bright LED lighting into the frame to illuminate the work area for shadow-free, detailed visibility so nothing is missed by the operator. Some models also feature color-changing LED lights to indicate when the shield is open or closed. For additional protection, an interlock will disengage power and prevent a connected machine from starting up when a PROTECTOR shield is not in the correct work position, thereby solving the operator bypassing problem. An optional safety monitoring relay can also be added to monitor the interlock switch for failure or damage.

Rockford Systems PROTECTOR Series Shields are modular in design so that shape, size, mount, arm, offset,

It's not always romantic...

Make sure your power equipment is fully operational.

With over 35 years experience, Cadick Corporation uses state-of-the-art software and standards of IEEE, ANSI, NFPA, and other applicable industry regulations to develop customized engineering studies for your facility.

- Extensive analysis & reporting
- Fabrication & installation
- Comprehensive electrical safety audits
- Engineering studies
- Electrical safety services
- Training

The benefits of using Cadick engineering services include:


- Safe and efficient operation of the electric power system
- Reduced fees and fines incurred due to poor power factor or other such problems
- Reduced power bills
- Compliance with regulatory standards such as OSHA and NEC
- Protective device settings that provide the most optimal mix of properly rated & calibrated protective equipment
- Enhanced safety of personnel for arcing events



Call 800-931-8573 or visit
cadickcorp.com for more information.




Get Cool!



**Extend
transformer
life!**

**Increase
transformer
capacity up
to 166%!**

- expert technical assistance
- large inventory
- low sound levels
- one-piece cast aluminum blades
- energy-efficient motors
- galvanized or stainless steel guards



p.o. box 187 germantown, wisconsin 53022

262.255.2318

www.krenzvent.com

lighting, interlocking and safety monitoring is easily configured to provide the best solution for the specific machine. PROTECTOR shields are manufactured by Rockford Systems LLC in Rockford, Illinois, USA and available for immediate ordering.

To learn more visit <https://www.rockfordsystems.com/product/PROTECTOR-series-shields/>

ABOUT ROCKFORD SYSTEMS LLC

Headquartered in Rockford, Illinois, Rockford Systems LLC delivers industrial plant safety solutions for organizations using metalworking, automation, material handling or thermal processing in their operations. Since 1971, Rockford Systems has specialized in the design and installation of over 25,000 safeguarding solutions for industrial fabrication equipment and manufacturing systems that exceed applicable safety regulations and standards.

Rockford Systems offers trusted industrial turnkey safeguarding solutions including scalable assessments, audits and inspections, training and education, consulting and policy development, and over 10,000 safeguarding products. Rockford Systems also provides turnkey combustion safety solutions including assessments and inspections, as well as standardized and customized valve safety trains. These extensive risk reduction solutions enable organizations to dramatically improve compliance and worker safety while maintaining productivity.

www.rockfordsystems.com/product/PROTECTOR-series-shields/ •

BURCH

MANUFACTURING COMPANY, INC.
Family Owned Since 1882

Agricultural Weather Protection/ Heat Houser: An accessory for tractors that channels heat from the engine back to the operator.

Industrial Weather Protection: 3S Kab King, Heat Tube, HCI Heat-Houser
An accessory for industrial machinery that protects operator from the element

Kolaps-A-Tanks: Portable water tanks that are NSF/ANSI Standard 61 approved for contact with drinking water.

Fire Kolaps-A-Tanks: Collapsible water tanks used in rural areas.

Decontamination Booths: DB85 used in hazardous incidents.

Vehicle Overload Signs / Safety Flags: Used in the trucking industry.

If a product you need can be made of canvas or vinyl coated nylon, chances are we can sew it, heat seal it, or silkscreen it.

Burch Manufacturing Company, Inc.
618 1st Avenue North • Fort Dodge, Iowa 50501
Phone: 515-573-4136 • Fax: 515-573-4138
burchmfg@frontiernet.net • www.burchmfg.com

COMPREHENSIVE LOADING DOCK SOLUTIONS

ONE OF THE BUSIEST PLACES IN THE PLANT DESERVES
THE HIGHEST DEGREE OF FALL PROTECTION



CANTILEVER DOCK GATES

- GATES LIFT STRAIGHT UP AND OUT OF THE WAY
- SINGLE OR SPLIT-OPENING MODELS
- MODELS FOR 4' TO 20' SPANS



SHIPPING PIT RAILINGS



SWING AND ROLLER GATES



SELF-CLOSING GATES

At Safety Rail Company, we offer comprehensive fall protection systems that provide barrier protection for dock doors, shipping pits, equipment storage areas and more. Systems that prevent accidents while keeping employees secure and productive in their workplace.



PROTECT LIVES.
BE OSHA COMPLIANT.
CONTACT US TODAY.



SafetyRailCompany
Fall Protection for Life and Compliance

SAFETYRAILCOMPANY.COM | 888.434.2720

About Safety Through Engineering

Safety Through Engineering, Inc. is a Structural and Safety Engineering, Expert Witness, Safety Training and Consulting firm with the reputation as a pioneer of innovative design and safety solutions. For over 35 years we have provided cutting-edge design services by expanding traditional engineering approaches.

At STE, we incorporate new concepts and technology throughout our projects with 3D BIM, finite element analysis, fabrication drawings and a plethora of services. Fueled by a forward thinking team, STE serves a superior client base with innovative industry solutions.

Why Choose Us

Uniquely qualified engineers, construction specialists, fall protection experts and advanced safety trainers, STE's team of professionals advocate solutions based on practical experience, emerging technology, customized education and specialized training.



Phone: 937-964-1900

E-mail: info@ste4u.com



Obtaining Sustainable Safety®
in Design

“Our approach to any design must consider all possible outcomes, especially the safety of the individuals for whom and through whom our designs are intended.”

*Mike Wright
President, STE Inc.*



Engineering

STE is recognized for safe, sustainable, cost effective designs and analyses

Training

Knowledge facilitates wisdom, which facilitates innovation



Safety Consulting

Efficiency is reached with usable solutions that synchronize safety and engineering

Expert Witness

Let us help you understand and untangle the complexities






Brass Knuckle® SmartCut™ BKCR303 offers dexterity, grip, and cut protection

OSHA estimates that more than 70 percent of hand and arm injuries could be prevented with the proper protective equipment. Lack of compliance is often the greatest challenge to workplace safety, and compliance increases when PPE is comfortable to wear. That means considering form and fit as well as function.

Brass Knuckle® SmartCut™ BKCR303 gloves succeed on three fronts by providing dexterity, grip and ANSI cut level A2 protection. This triple threat is accomplished with a glass fiber and ultra-high-molecular-weight polyethylene (UHMWPE) shell — a composite yarn that has a strength-to-weight ratio eight to 15 times greater than steel — and polyurethane coating. The thinner, 13-gauge material delivers deftness without trading away its inherent cut-resistance.

The non-sticky polyurethane coating on the palm and fingers features excellent grip, even against oils, fats, and greases, and can deliver enhanced puncture protection and abrasion resistance, all without adding bulk or reducing touch sensitivity.

In addition, the glove's uncoated back and wrist improves ventilation. A seamless and stretchable full knit wrist provides a snug fit and prevents dirt, debris, and cold from getting inside glove. Color-coded

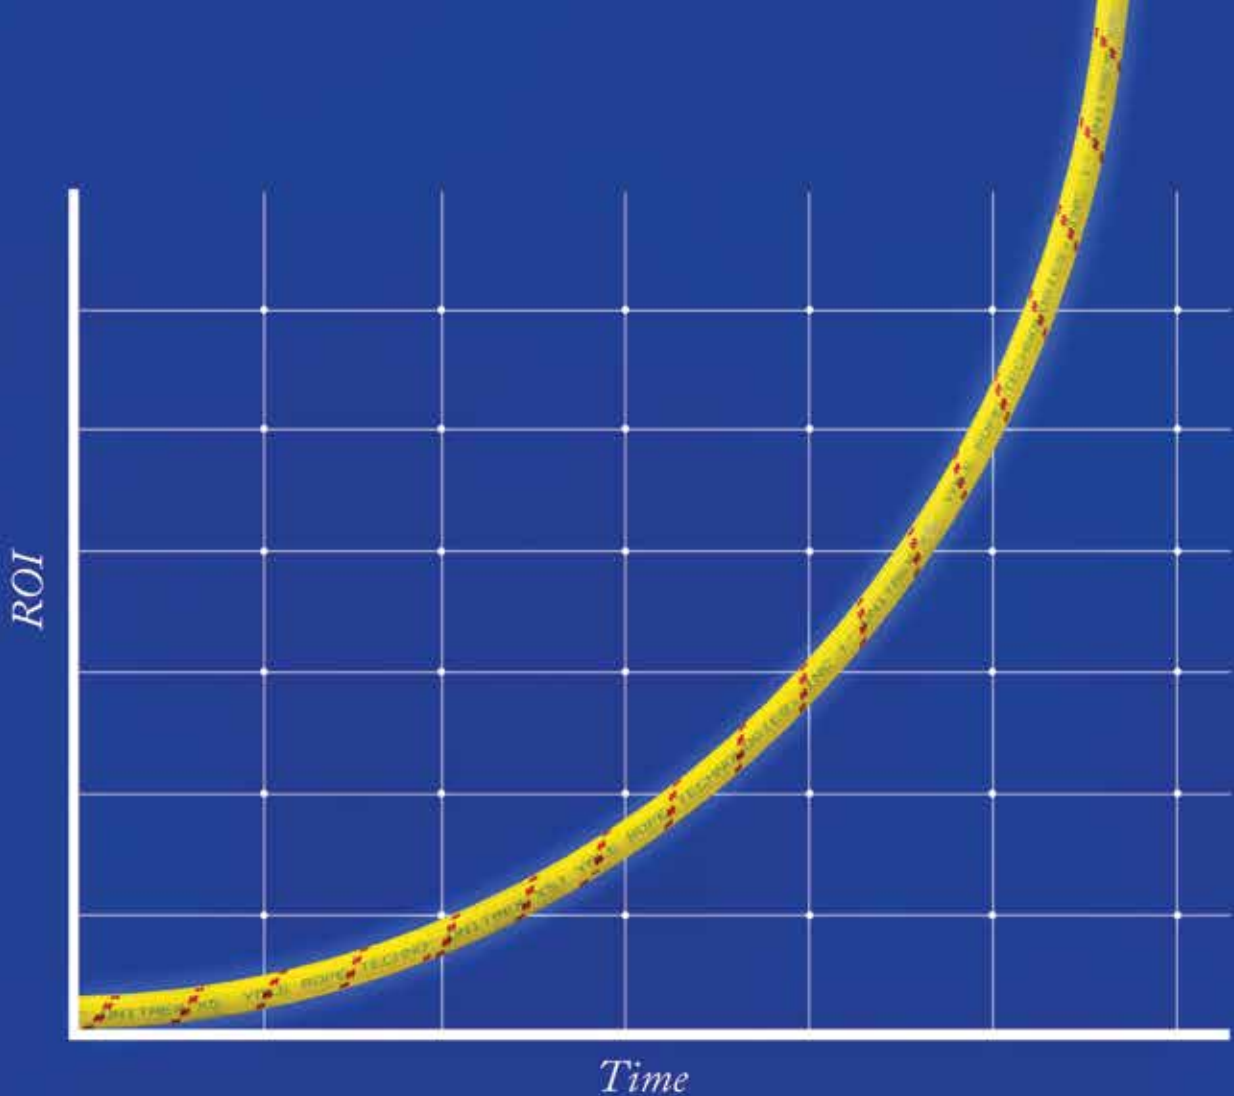

Unitrex XS™ Max Wear. Unmatched performance in the field and in the boardroom.

Electric line stringing is easier and more economical with Unitrex™. Made with a core of Honeywell Spectra®, it is up to 10 times lighter than steel, while delivering comparable strength. The urethane-coated polyester jacket provides excellent abrasion resistance for great productivity that lasts.

To learn more, visit www.yalecordage.com

YALE CORDAGE
Performance. Passion. Possibilities.

77 Industrial Park Road | Saco, Maine 04072 | p (207) 282-3396, f (207) 282-4620

jesco
— Since 1932 —

Jesco Industries, Inc.
950 Anderson Rd PO Box 388
Litchfield, MI 49252-0388

ProGMA
PROTECTIVE GUARDING MANUFACTURERS
Safer by Design

Jesco does it best!

Visit **JescoOnline.com**
Call **800-529-6697**



cuffs easily indicate glove size.

Brass Knuckle designed the BKCR303 to provide enhanced flexibility and deliver the right balance of mechanical protection, performance, and comfort. For more information, visit <https://www.brassknuckleprotection.com/products/BKCR303>.

www.brassknuckleprotection.com •



SLIP AND FALL PREVENTION!

Since 1993

NEW!

TESTING DYNAMIC COEFFICIENT OF FRICTION (DCOF) ASM 925

DIGITAL ASM 825A SLIP METER

WET AND DRY TESTING
CALIBRATES TO ANSI/NFSI B101.1

SAFE FLOORS MAY INCREASE PRODUCTIVITY
AND WILL CERTAINLY REDUCE LOSSES

SCOF RESULTS WITH AN EASY-TO-USE
PORTABLE FLOOR FRICTION TESTER

PH: 941-681-2431 | FAX: 941.681.2487

AMERICAN SLIP METER®

WWW.AMERICANSLIPMETER.COM



EXIT DOOR KIT



GREAT FOR INDUSTRIAL
BUILDINGS, SCHOOLS AND
SPORTS COMPLEXES

PHOTOLUMINOUS KIT
INCLUDES:

- Tape for door marking
- Low-level exit sign
- Reverse exit sign



Safe-T-Nose®

LEAVE NO DOUBT • THIS WAY OUT • EXIT SAFELY

1-855-723-6673 • SALES@SAFETNOSE.COM

NEED HELP WITH YOUR
COMBUSTIBLE DUST?



CONTACT THE DUST
EXPLOSION EXPERTS

Dust Hazard Analysis

Incident Investigation

NFPA & OSHA Compliance

Dust Testing

561.626.5556

www.dustconsolutions.com

LTBLtech, LLC - Call: 615.593.0510



LASER LINE'S

PROJECTED SIGN'S

Because Painting & Taping Sucks!

Visit us on the web - www.LTBLtech.com



Low Voltage Electrical Hazards in the Workplace

Each year 120 Volt circuits cause more deaths and injuries than circuits of all other voltage levels combined. Such low-voltage circuits are extremely hazardous for two reasons. First, low-voltage circuits are the most common because they are the final distribution voltage, 240V, 208V, and 120V circuits are used throughout residential, commercial, industrial, and utility systems.

The second reason for extreme danger of low-voltage circuits is user apathy. Comments such as “It can’t hurt you; it’s only 120 volts” are heard all too often. 120 Volt circuits can produce currents through the human body that can easily reach fibrillation levels. Consider a perspiring worker using a metal electric drill with one foot immersed

in water. Clearly under this condition a worker can be subjected to a lethal shock. Furthermore, if sustained for a sufficient period, 120 Volt contact can create severe burns. I will spell out several techniques to avoid electrical incidents later in this article.

Warning Signs

It is my opinion that we have dumbed down our society’s electrical safety knowledge by placing “DANGER – HIGH VOLTAGE” signs on every level of voltage and have led the population to believe the only voltage that is dangerous is high voltage. In reality, and by OSHA voltage standards, most people in American workplaces are always exposed to low voltage and almost never exposed to high voltage.

Electrical Hazard Warning Signs should be labeled “DANGER – HAZARDOUS VOLTAGE,” to help people understand that all voltages are potentially dangerous. Based on the fact we kill more people on low voltage than any other voltage, “HAZARDOUS VOLTAGE” markings make a lot of sense.

A Common Low-Voltage Hazard Sources

Some of the low voltage hazards that lead to electrical shock and electrocution hazards are related to the use of extension cords and portable electric tools.

Extension cords that are not handled properly can easily become an electrocution hazard. If cords are twisted up, run over with forklifts, pinched or crushed, or if the jacket is broken at the plug cap or where the cord is wrapped around a drill, saw or grinder, the ground conductor can easily become broken.

Frequently, ground pins are broken off so the cord can be plugged into a two-wire receptacle that does not have a ground. Or, a three-prong plug is plugged into a UL approved adapter designed to be plugged into a two-pronged outlet. Plug caps are replaced by personnel that are not electrically qualified and are improperly wired. These situations create a death hazard because there is no low impedance ground connection to cause enough current to flow to blow a fuse to trip a circuit breaker to clear the fault.

The Circuit is Grounded

We have all heard many, many times a phrase that should have never been uttered in the first place. That phrase is: “Electricity always takes the path of least resistance.” Because of this misunderstood statement, many assume that all current will flow through the ground wire. However, this statement is only partially true! The truth is that electricity takes every path available to it no matter what the resistance of the path, and there is almost always more than one path.

For example, when an electric tool equipped with a three-prong plug shorts out, the person holding the tool is an

alternate path to the earth; thus, the current will split between the person and the electrical ground wire. If the ground conductor is broken, or if the ground pin has been broken off the plug, or the 3 prong plug is plugged into an adapter and energized from a 2 prong receptacle, and the tool shorts out, the person becomes the only path to the earth. In either of these cases, there may be enough current through the body to be fatal.

How much current is enough?

There is no safe path through a human body for electrical current That is – any current through the body from an external source can cause unwanted results depending on magnitude.

Current	Effect
1 mA	Barely perceptible
1-3 mA	Perception threshold (most cases)
3-9 mA	Painful sensations
9-25 mA	Muscular contractions (can't let go)
25-60 mA	Respiratory paralysis (may be fatal)
60 mA or more	Ventricular fibrillation (probably fatal)
4 A or more	Heart paralysis (may restart through CPR)
5 A or more	Tissue burning (fatal if vital organ)

Table 1 shows the approximate effects that current may have on the human body. Several conditions may modify any given effect such as:

The actual path through the body. For example, current from the hand to the shoulder is not likely to cause fibrillation since it does not pass through the heart.

The length of time the current continues to flow. For example, currents in the 9-25 milliamp range through the heart for a short time, will probably not cause fibrillation to occur. However, since the victim may not be able to release contact, fibrillation may indeed result.

The health and other physical characteristics of the individual receiving the shock.

The frequency of the current flow may make a difference. Different frequencies of current affect the body in differ-

ent ways. All the values in Table 1 assume frequencies of 60Hz or lower.

Example

If the path through the body has 7,500 Ohm resistance, and the tool is energized at 120 volts, the resulting current flow through the person is 0.016 of an Ampere, or 16 milliamps. When you pass current through a muscle, the muscle contracts. When the current reaches the level where the muscle contracts and the person loses voluntary muscle control, it is referred to as the let go threshold or paralysis threshold. This means that the muscles clamp down and the victim cannot release their grip on the shorted tool.

Fibrillation

When the heart is in fibrillation, it flutters arrhythmically and does not pump any blood. Fibrillation of the heart is the most common cause of low voltage electrocutions.

As you can see in Table 1, the range of current flow for this example is between 9 and 25 milliamperes. This varies among individuals. Even with that small amount of current, the victim can be paralyzed and can do nothing to help themselves. If no one is available to rescue the victim, their heart may start to fibrillate.

There are no documented cases of anyone's heart going into fibrillation and returning to normal rhythm without the assistance of outside intervention. If the heart goes into fibrillation and there is no one available and trained on the use of an AED (Automatic External Defibrillator), the person will die.

Protection from the effects of electrical shock

Most untrained and even some well-trained employees do not understand that anytime you place your hand on a piece of energized electrical equipment, you become a resistor in parallel with a short piece of conductive wire or metal structure. The voltage characteristics of parallel resistors is that each of the parallel resistances experience the same voltage drop across them.

Generally, breakers and fuses in industrial installations

are sized according to the current carrying capacity of the conductors installed in the circuit. Everything is installed according to the National Electrical Code (NFPA 70) and are designed to not overheat the conductor and thereby prevent burning the plant down. This means that the fuses and circuit breakers in a system cannot be depended upon to protect the worker from shock.

Ground Fault Circuit Interrupter (GFCI)

The only electrical device designed to protect personnel is a GFCI. This device will trip for currents between 4 and 6ma. They are equipped with a breaker in the energized leg that will trip within 25 milliseconds. If a person is holding a steel cased tool that shorts out with bare hands, all the time the case of the tool is energized they are part of the circuit with current flowing through their body.

OSHA and the NEC rules mandate the use of a GFCI anytime portable energy supply is used. This means anytime you use a portable generator or an extension cord in the workplace the use of a GFCI is mandated.

Qualified workers and job safety briefings

OSHA states that qualified electrical workers are the only personnel that can be exposed to voltages greater than 50 volts. NFPA 70E 2018 Edition defines Qualified Person. "One who has demonstrated skills and knowledge related to the construction and operation of electrical equipment and installations and has received safety training to identify the hazards and reduce the associated risk." Note that only qualified persons may work on or near energized conductors.

OSHA also mandates a Job Briefing be held before the start of each job. "The employee in charge conducts a job briefing that meets paragraphs (b), (c), and (d) of this section with the employees involved before they start each job."

"The briefing shall cover at least the following five subjects: Hazards associated with the job, work procedures involved, special precautions, energy source controls, and personal protective equipment requirements."

The number of briefings: "At least one before the start of each day or shift. If the work or operations to be performed during the workday or shift are repetitive and similar, at least one job briefing shall be conducted before the start of the first job of each day or shift.

"Additional job briefings: shall be held if significant changes, which might affect the safety of the employees, occur during the course of the work."

Extent of job briefings

"Short discussion: A brief discussion is satisfactory if the work involved is routine and if the employees, by virtue of training and experience, can reasonably be expected to recognize and avoid the hazards involved in the job. A detailed discussion shall be conducted if the employee cannot be expected to recognize and avoid the hazards involved in the job."

"Detailed discussion. A more extensive discussion shall be conducted: If the work is complicated or particularly hazardous, or, If the employee cannot be expected to recognize and avoid the hazards involved in the job."

"Working alone: An employee working alone need not conduct a job briefing. However, the employer shall ensure that the tasks to be performed are planned as if a briefing were required."

When the heart is in fibrillation, it just flutters and does not pump any blood. Fibrillation of the heart is the most common cause of low voltage electrocutions.

Training requirements

Training, or lack thereof, is a relatively large problem in the United States. OSHA and NFPA 70E lay out mandates and responsibilities. An example can be found in NFPA 70E 2018 Edition in Article 105.3, and I quote it here:

"Responsibility. The employer shall have the following responsibilities:

- Establish, document, and implement the safety-re-

lated work practices and procedures required by this standard.

- Provide employees with training in the employer's safety-related work practices and procedures.
- Employee Responsibility. The employee shall comply with the safety-related work practices and procedures provided by the employer."

Another excellent information source is the Informative Annex Section published in NFPA 70E 2018 Edition. Informative Annex K. General Categories of Electrical Hazards. Lists General information pertaining to Electrical injuries and fatalities, and general categories of electrical shock and electrical burns. It states, "About 98 percent of fatal occupational electrical injuries are electrical shock injuries. 40 percent of electrical incidents involved 250 volts or less and were indicative of a misperception of electrical safety as a high voltage issue."

Informative Annex Q – Human Performance and Workplace Electrical Safety

Annex Q states: "Based on studies done by high-risk industries indicate human error is often a root cause of incidents. The premise of this annex is that human error is similarly a frequent root cause of electrical incidents."

Summary

This article considers some of the safety-related concerns that apply to low voltage circuits – that is, circuits of 1,000 Volts ac or less and 250 Volts dc and less. Workers should treat low-voltage with the same degree of respect afforded medium and high-voltage circuits.

Electrical safety does not just happen. It requires knowledge of the electrical hazards and potentially hazardous conditions and situations. And, it takes constant effort and vigilance to maintain an electrical safety program, whether you are working alone or with other employees.

Ad Index

Company	Pg.	Website
American Slip Meter	18	www.americanslipmeter.com
American Technical Publishers	7	www.atplearning.com
Bucaneer Rope	8	www.bucrope.com
Burch Mfg	12	www.burchmfg.com
Cadick	11	www.cadickcorp.com
Columbia Southern University	IBC	www.columbiasouthern.edu
Core Safety	9	www.coresafety.com
Dustcon	19	www.dustconsolutions.com
Emars Inc	20	www.emarsinc.com
Jesco	18	www.jescoonline.com
Krenz Vent	12	www.krenzvent.com
Lad Top	3	www.ladtop.com
LTBL	19, BC	www.ltbltech.com
Omega	6	www.omegaindl.com
Rely On Nutec	5	www.relyonnutec.com
Safe T Nose	19	www.safetnose.com
Safety Rail Co	1, 13	www.safetyrailcompany.com
Safety Through Engineering	15	www.ste4u.com
Wooster Products	2	www.wooster-products.com
X Insurance	IBC	www.xinsurance.com
Yale Cordage	17	www.yalecordage.com



On Site Employee Verification

Bob Put In 9 Hours And 3 Minutes Of Work On Tuesday.
Stop Guessing. Start Verifying!

Always Know Who, When and Where with eMars Compliant Client and RFID
Be Davis - Bacon Compliant In Minutes • Users Report 85% Savings of Money and Time • Alerts You of 30 Compliance Errors

Ph. 480-595-0466



eMarsinc.com



Custom Insurance for the Construction Industry

With XINSURANCE, You Get...

- All-In-One Approach
- Agent Friendly
- Limits up to \$10MM
- Property & Casualty
- Professional Liability
- Commercial Auto Liability
(available in most states)
- Products Liability
- Exclusions/Gaps in
Current Coverage & More

Ask us
about our new
coverage option –
Communicable
Disease
Liability



To get your free
custom insurance
quote for the
construction industry,
visit www.xinsurance.com


You can also contact
Logan Fitzgerald directly at
801.304.5562 or
loganf@xinsurance.com

XINSURANCE is powered by Evolution Insurance Brokers, LC ("EIB"), an excess and surplus lines insurance brokerage. XINSURANCE is a DBA of EIB, which is domiciled in and has its principal place of business in Sandy, Utah. This insurance product is offered by an unlicensed surplus lines insurer. The NPN for EIB is 5464658 and CA license number is OH93938.

XINSURANCE

Why Laser Lines and Projected Signs? Because, You're Sick of Painting & Taping!

NEW SOCIAL DISTANCING GOBO Images For LightCop.

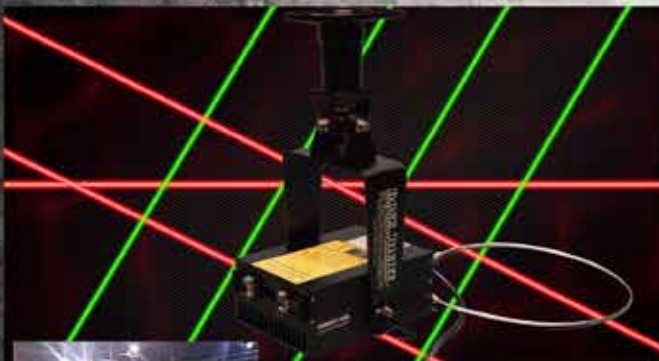

www.LTBLtech.com

615.593.0510